

# Multitherm Bandage

Thermal Insulation



**Fire resistance**  
≤ 120 minutes



**Working life**  
30 years



**Use**  
Indoor use



**Speed**  
Fast installation

## Thermal Insulation

Multitherm Bandage is a self-adhesive thermal insulation product on a roll, especially developed for the thermal and fire-resistant insulation of, for instance, metal pipes at short distances from the fire-resistant partition.

Multitherm Bandage absorbs the temperature of the pipe, so that no temperature to adjacent rooms can take place.

Multitherm Bandage forms part of the Mulcol® Penetration Seal System.

### Advantages

- ✓ CE-certified
- ✓ Simple and fast installation
- ✓ Insulation length from 150 mm
- ✓ A single product of pipes up to Ø 114,3 mm
- ✓ No waste
- ✓ Environmentally and user-friendly
- ✓ Permanently elastic
- ✓ Working life of 30 years

### Applications

- ✓ Rigid floors
- ✓ Rigid walls
- ✓ Flexible walls
- ✓ Firestop boards
- ✓ 2 Components Fire Protection Foam
  
- ✓ Metal pipes up to Ø 114,3 mm
- ✓ Copper pipes up to Ø 88,9 mm
- ✓ Aluminium composite pipes up to Ø 75 mm

### Technical data

<b>Colour</b>	Red/brown with a gray top layer
<b>Application temperature</b>	+5 °C to +30 °C
<b>Temperature resistance</b>	-20 °C to +60 °C
<b>Reaction to fire</b>	Class E in accordance with EN 13501-1

## Packaging

	Dimensions	Box	Pallet	Article number
Roll	3000 x 150 x 3 mm	1 piece	100 pieces	205001300



## Technical documents available

- ✓ Product Data Sheet (PDS)
- ✓ Technical Data Sheet (TDS)
- ✓ Safety Data Sheet (SDS)
- ✓ Installation Manual
- ✓ EC certificate

## Approvals

- ✓ Tested in accordance with EN 1366-3
- ✓ Classification in accordance with EN 13501-2
- ✓ Certified in accordance with EAD 350454-00-1104
- ✓ ETA report 17/0837
- ✓ Declaration of Performance (DoP)

The above documents are available from your Mulcol contact person or via [www.mulcol.com](http://www.mulcol.com)

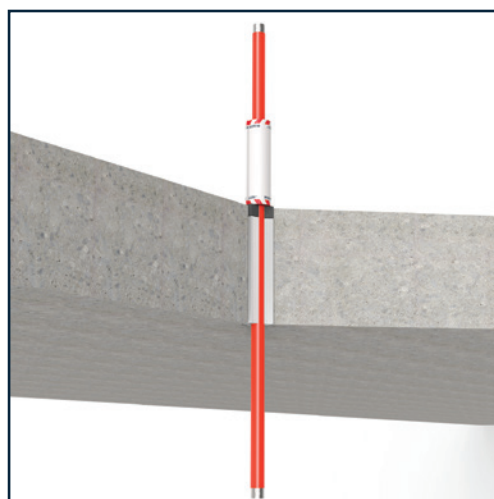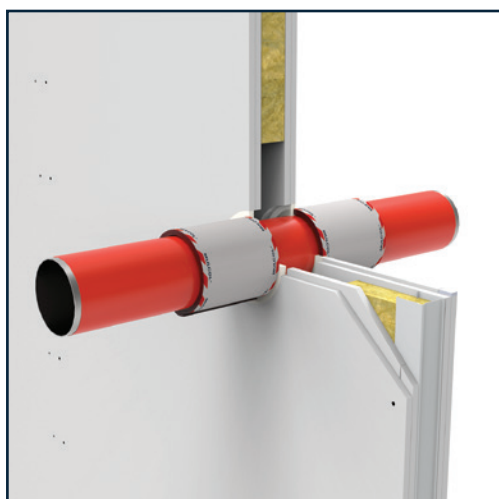

Virtual Reality



Augmented Reality



Information



Mulcol International composed the technical data on this sheet with great care and reserves the right to change product properties without prior notification. The user of this data remains responsible at all times for the correct application thereof. In the event of a lack of clarity or doubt, we recommend consulting Mulcol International to confirm that this data complies with the required application.